


## V RUSTIC TONGUE & GROOVE SIDING

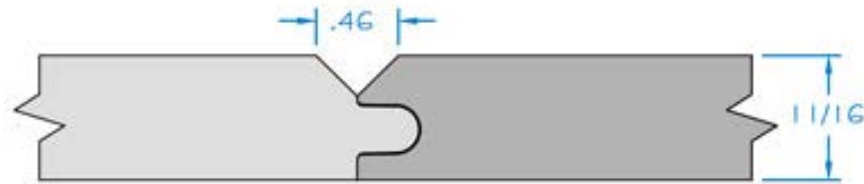

| Nominal Size | Actual Thickness | Actual Width | Reveal  | Gap  |
|--------------|------------------|--------------|---------|------|
| 1 x 4        | 11/16"           | 3-1/2"       | 3-1/8"  | .46" |
| 1 x 6        | 11/16"           | 5-1/2"       | 5-1/8"  | .46" |
| 1 x 8        | 11/16"           | 7-1/4"       | 6-7/8"  | .46" |
| 1 x 10       | 11/16"           | 9-1/4"       | 8-7/8"  | .46" |
| 1 x 12       | 11/16"           | 11-1/4"      | 10-7/8" | .46" |

All Dimensions are +/- .03125

### Installers and building owners praise these advantages of DURATION<sup>®</sup> T&G Joint Siding:

- Tight thickness tolerance (specifically gauged for 11/16" thickness)
- Better adherence to wall since adjacent pieces "lock" together
- Available in virtually any dimension and up to 1/4" gap on Nickel Gap (Channel) profile
- Available quickly (Smooth is stocked, short lead time on woodgrain)
- Smoother (flatter) finish surface
- Slightly more coverage per board
- Only 2 fasteners required across face on 1x8 and 1x10 material (3 on 1x12)
- Class A Fire Rating
- Complimentary Mouldings available